

Recommended fabrics

Main: Knit fabrics (Waffle knit cotton, French terry, sweatshirt fleece, brushed sweater knit, squish knit fabric, etc.)

Neckband, sleeve cuffs, hem band: knit fabrics with good recovery (rib knit, waffle knit cotton, etc.)

Note: For neck & front band, if you use rib knit (or other knit fabric with 40-50% stretch, use the shorter length. If you use non-rib fabric (or fabrics with 20-30% stretch), use the longer neckband).

Fabric requirements


Requirements based on 150 cm (60") wide fabric:

Size	Bodice & Sleeves		Pockets, Cuffs & Bands	
	Meter	Yard	Meter	Yard
0-3m	0.3	0.3	0.1	0.1
3-6m	0.3	0.4	0.1	0.1
6-9m	0.3	0.4	0.1	0.2
9-12m	0.4	0.4	0.1	0.2
18m	0.4	0.4	0.2	0.2
2y	0.4	0.4	0.2	0.2
3y	0.4	0.5	0.2	0.2
4y	0.5	0.5	0.2	0.2
5y	0.5	0.5	0.2	0.2
6y	0.5	0.6	0.2	0.2
7y	0.6	0.6	0.3	0.3
8y	0.6	0.6	0.3	0.3
9y	0.6	0.7	0.3	0.3
10y	0.6	0.7	0.3	0.3

Assembling your pattern

- Printing instruction for A4 file:
 Size **NB-3/6M**: PAGES **1-4, 7-12, 15-17**
 Size **6/9M-18M**: PAGES **1-4, 7-17**
 Size **2Y-4Y**: PAGES **1-17**
 Size **5Y-10Y**: PAGES **1-18**

- Laying out the pattern sheets based on the following "Printing Layout" (Rows are marked by letters (A, B, C, etc.) and columns are marked by numbers (1, 2, 3, etc.)):

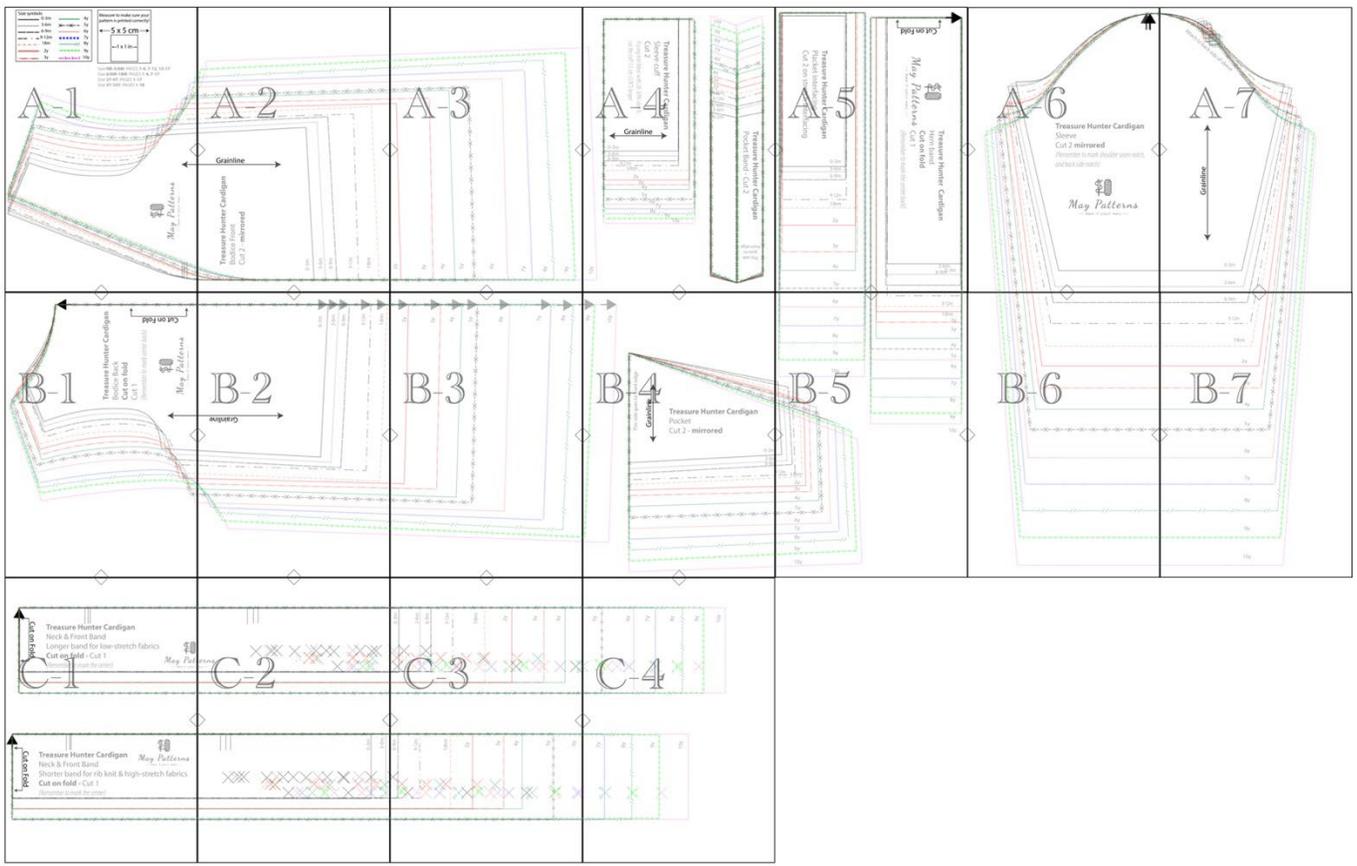


- Cut out each pattern page along the black margins.
- Tip: cut the right and the bottom margins of each page only for easy taping.
- Tape the sheets together.
- Cut out the paper pattern along the cutting lines

🌀 **NOTE: Seam allowance of 1 cm (3/8") is already included.**

3. SEWING INSTRUCTIONS

🎯 **NOTE:** Seam allowance of 1 cm (3/8") is already included, unless otherwise stated.

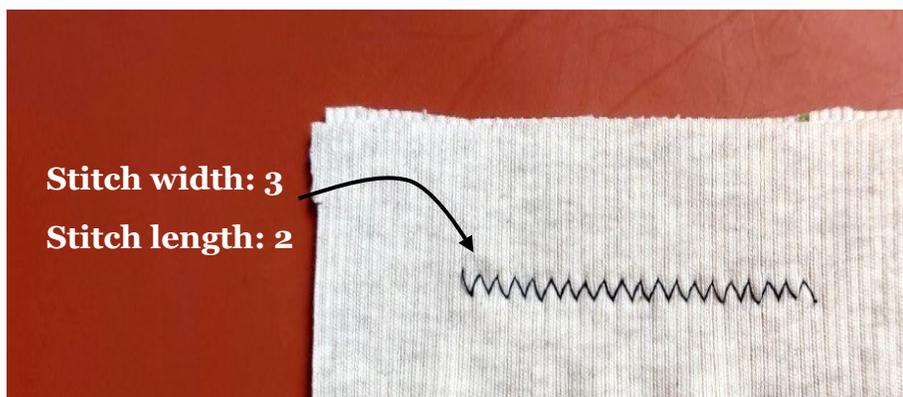

1. If you are going to sew with a regular sewing machine (not a serger/overlocker), make sure to use zig zag stitch setting to maintain the fabric elasticity. You should adjust to a proper width and length, and test the stitch settings on a fabric scrap before starting your project. See the picture for setting reference. You should also check the thread tension to make sure the stitch is not too tight or too loose.



2. Start from the pocket. If you don't want to sew pockets, skip to **Step 6**. Fold the pocket bands in half lengthwise **WRONG** sides together. Arrange the bands and the pockets to make sure the sides that go towards the front edge are sewn to the front edge.



3. Lay the bands on the **RIGHT** sides of the pockets. Sew/serge along the top edges (white zig zag lines).