

# Tutorial

## Stitches and colours

Use split stitch, satin stitch, back stitch, chain stitch and french knot.




# Preview only!

anthrazit 00236

**Thread colour** from Rico:

neon orange 949, neon green 948

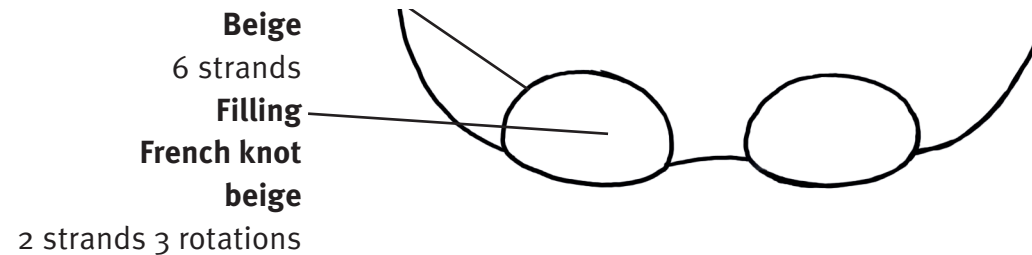

## Artwork 1


Set the printer to „real size“ or set the scaling to 100%.

### After printing:

Draw the cat on the right side of the fabric. Turn the fabric to the




# Preview only!

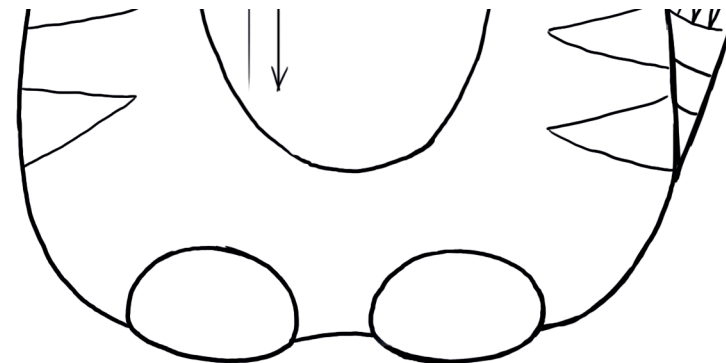


# How to do the stitches

## Satin stitch

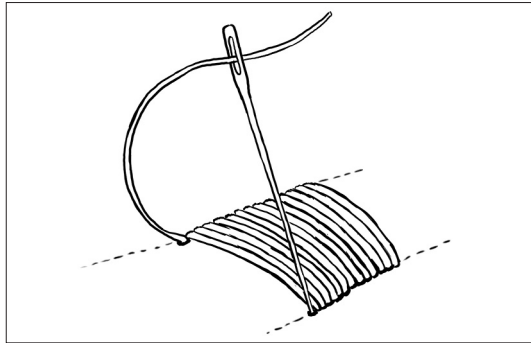


Set the stitches close to each other for filling the space.

## Back stitch

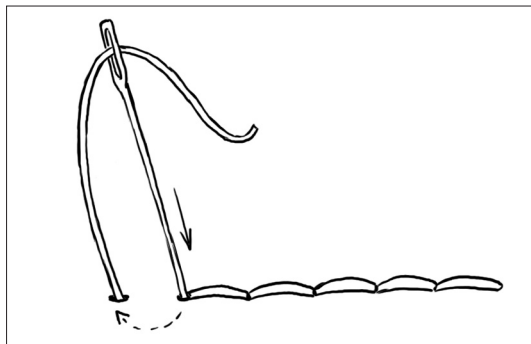


Move the needle bottom up through the fabric in same distance like the stitch before. Then put the needle to the hole at the end of the last stitch.

## Split stitch

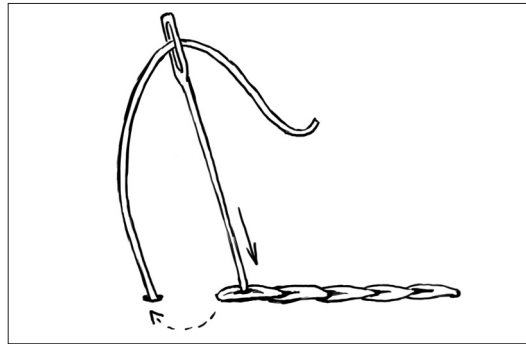


Move the needle bottom up through the fabric in same distance like the stitch before. From up you stitch directly in the strand of the stich before and split it with the needle.

## French knot

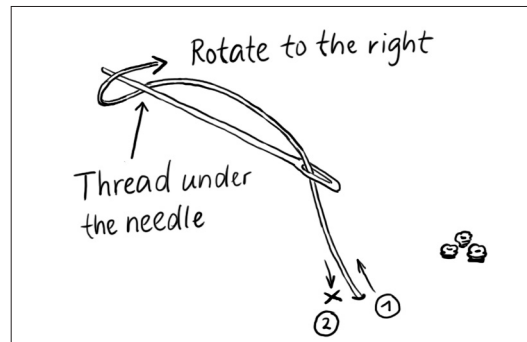

Pull the strand under the needle to the left side and rotate it over the needle to the right side. Make 1-3 rotations. Then stitch with the needle nearby the previous puncture.

## Chain stitch

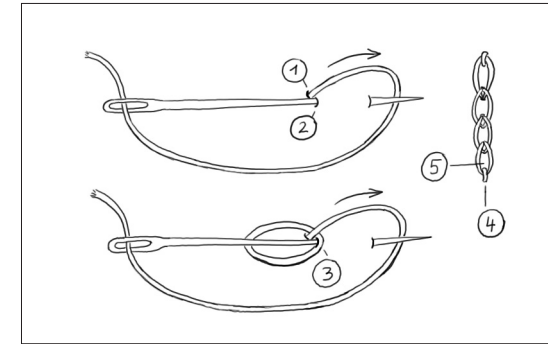

Stitch in at 1 from the bottom up. Then stitch again just to the side at 2 and go out a few millimeters away, looping the thread under the peak of the needle and pulling the needle through. A loop is formed.

At 3 stitch inside the loop again and repeat all operations.

At the end (4) put a simple stitch over the loop. If you want to start again because, for example, your thread has run out, stitch inside the finished loop (5) again.

# Sewing tutorial

**Step 1:** The embroidery work is ready. Now you lay both fabric pieces right side to right side and fix it with pins. Now you see on the left side of the embroidery the sewing line that you have drawn before.

**Step 3:** You have sewn both fabric pieces on each other. Now you cut the rest of the fabric with a jag scissor to 5mm from the seam. (see the broken outline in the pattern). Set a small cut in the edges short to the seam. Then the seam allowance will lay well in the edges after turning.



# Preview only!

beside the body, also for the filling later.

