



DIY SEWING ACADEMY
 Backpack No. 2
 Zutaten/notions & hardware

	WOMENS M			MENS L			KIDS S			Mini		
	St/ct	cm	in	St/ct	cm	in	St/ct	cm	in	St/ct	cm	in
Trägerband/Straps												
Vorderseite Deckel/front flap	2	14	5,5	2	18	7	2	9	3,5	2	12	5
Vorderseite unten/bottom front	2	18	7	2	24	9,5	2	14	5,5	2	15	6
Rückseite Leiterschnalle/back strap adjuster	2	7	3	2	9	3,5	2	7	3	2	7	3
Rückseite unten/back bottom	2	30	12	2	40	16	2	20	8	2	28	11
Tragegriff/carry handle	1	26	10	1	26	10	1	22	8,5	1	26	10
Gesamt/total	164		65	208		82	122		49	150		60
Kordelzug/Drawstring												
Hauptöffnung/main compartment closure	1	100	40	1	120	48	1	60	24	1	85	34
Seitentasche/gusset pocket	1	21	8	1	28	11	1	16	6,5	1	20	8
Gesamt/total	121		48	148		59	76		31	105		42
Reißverschlüsse/Zippers												
Tasche Vorne/front pocket	1	24	9,5	1	26	10	1	16	6	1	20	8
Deckel/flap	1	16	6	1	20	8	1	12	5	1	14	5,5
Einfass- oder Schrägband/Bias or binding tape												
Hauptöffnung/main compartment opening	1	100	40	1	120	48	1	60	24	1	85	34
Schulterträger/shoulder straps	2	98	39	2	124	49	2	65	26	2	85	34
Innennähte/interior seams	1	150	45	1	185	52	1	100	30	1	130	52



BACKPACK No. 2: CUTTING, SEWING & ASSEMBLY INSTRUCTIONS

C3

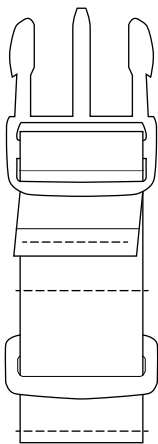

(see illustration d).

C2

Sew the darts on the front pocket and finish the resulting seams, if applicable.

C3

Finish one end of the strap, for example, by folding the end twice and topstitching. Thread the unfinished end of the strap first through the loop and then through the bottom end of the side-release buckle. Topstitch the straps with the bottom part of the side release buckles: Place a loop between the bottom and top attachment. One end of the strap should disappear below the front pocket (see illustration). Thread the finished end through the loop.

C4


Topstitch the front pocket onto the front of the backpack. The seam allowance will remain unfinished and face the inside of the pocket.

GUSSETS

D1

Sew both drawstring covers AA1 onto the top raw edge of exterior gusset pocket 1 AST. Thread drawstring through the channel, cord lock, bead, back through cord lock and remaining channel (see illustration). Topstitch drawstring and the sides of the pocket to keep the ends in place.

D1

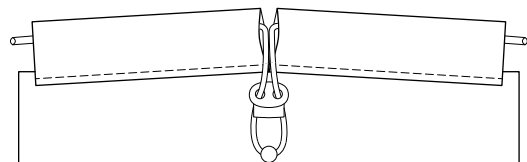

D2

Sew the cover AA2 onto the top raw edge of exterior gusset pocket 2 AST.

D3



Sew the darts at the bottoms of the pockets.

D4

Sew both exterior gusset pockets AST onto gussets AS.

D5

Connect the two gussets AS with the bottom AB. Finish the seams.

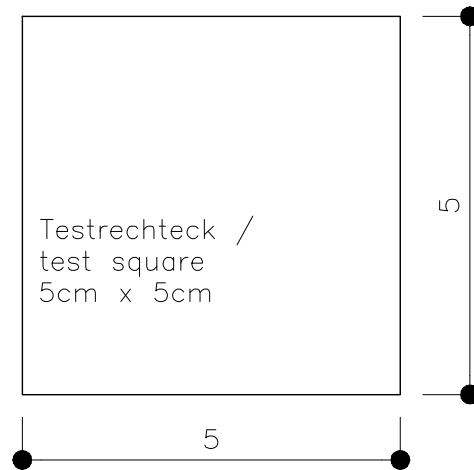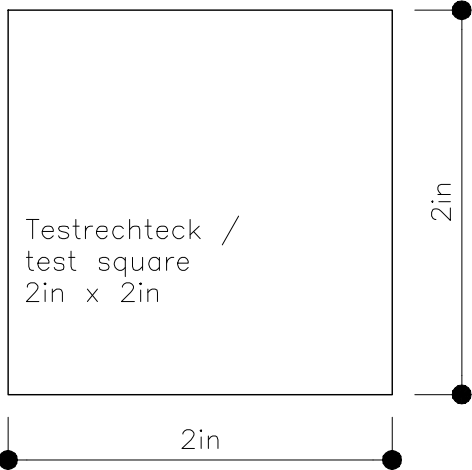

A

ITU

DIY Sewing Academy

BACKPACK No. 2 M

Tunnelzug/channel

(1) Stoff Außen/exterior fabric

BITTE NAHTZUGABE ZUFÜGEN!
PLEASE ADD SEAM ALLOWANCE!

86cm lang

86cm/34in

