



creative sewing lab



3 fastener variations

PURSE "ARVED"

• Sewing pattern & instructions •




Both fabric pieces are now laying on top of each other with the wrong sides together. Iron around the opening to flatten both fabric layers. Now you need your zipper with a zipper-pull.



If you are using a zipper per metre and a separate zipper-pull open the zip completely so that you have 2 pieces. Just pull the tapes apart - they should separate fairly easily. Cut off 2 mm of the teeth of one of the zip parts (see photo on the right).



Thread the other piece of the zipper (with no cut teeth) into the zipper pull (2 or 3 teeth into the slide). Now take the zip piece with the cut off teeth and thread this piece into the zipper pull, too.

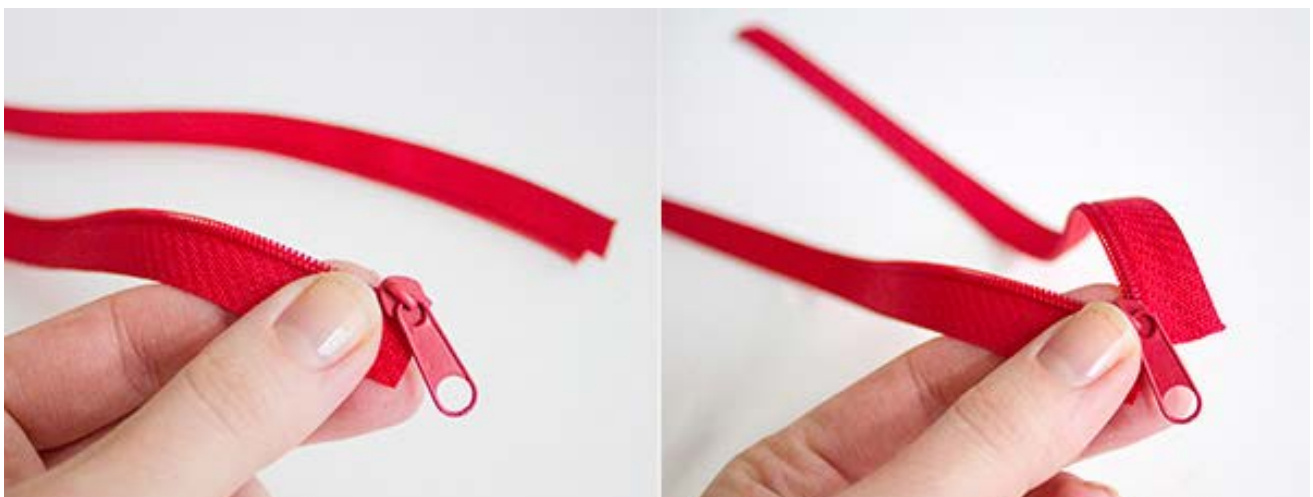



Turn the fastener, iron it and topstitch around it close to the edge. Place the fastener in the middle of the zipper compartment on the right - exactly centered (measure with ruler). Fix it with a clip or needle.



Take your fabric piece for the "outside" of the purse. If you are using a very thin fabric iron on a small piece of interlining on the back of your "outside" piece where the snap button will be. Apply a snap button with 2,5 cm distance to the left edge and horizontally centered.

Now place the finished outside part of the purse on top of the inside part (with the compartments) with the wrong sides out. The snap button is on the left side of the outside fabric whilst the fastener is on the right side of the inside fabric. Now topstitch all around both layers with 0,75 cm (0.3 inch) seam allowance - leaving a turning opening on the top left side. Shorten all seam allowances up to 3 mm.

