


INSTRUCTION BOOKLET

Coba top

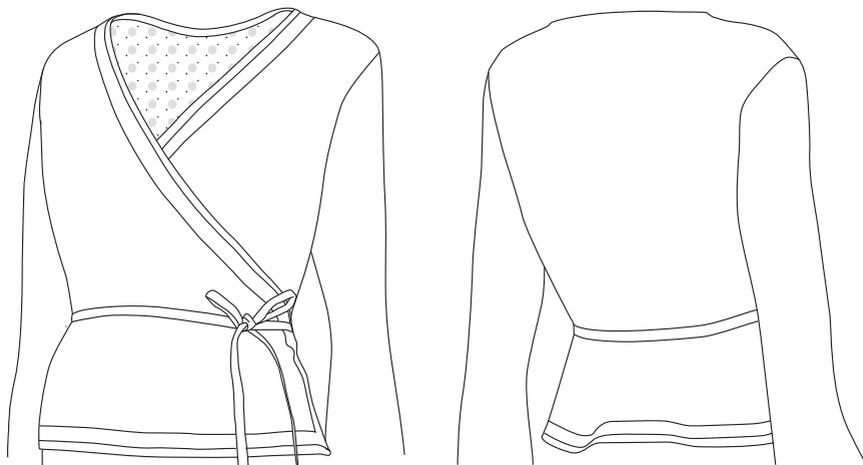

Coba..modèle

This information is given as a guide and should not be taken as contractual.

Around 4 cm has been added to the fabric requirement, to avoid fabric shortage.

Some fabrics shrink during the first wash, please make sure to check with the supplier before purchasing your fabric.

If the fabric chosen is very dry, you might get unwanted tucks when stitching. In this case you should pin the edges of the pieces to be stitched together with very little distance between the pins (choose small and thin pins, not the ones with plastic heads). The extra cloth should be spread evenly in between the pins. Be careful to also set the threads tension on your sewing machine correctly. If it is too tight, unwanted pleats might form.

It is advisable to sew a draft before cutting the clothe in its final fabric.

Level: intermediate



Wrong side



Right side



Right side



Notch

Supplies, not included :

Tailor chalk
A pair of fabric scissors
A pair of paper scissors
Pins
Threads and fabrics

Suitable fabrics :

Satin cotton, cotton popelin,
satin silk


Size chart cm	XS	S	M	L	XL
Chest round	78-84	84-86	88-96	96-102	102-108
Waist round	62-66	66-70	70-76	76-80	80-86
Hips round	86-90	90-94	94-98	98-104	104-110

STEP 12

Topstitch a seam at 1mm from the facing outside edge.

To start fold the edge towards the fabric wrong side along the seam (as stitched in **step 9**) then stitch. Don't forget to set your sewing machine threads tension, to avoid getting unwanted pleats.

Top stitch at 1 mm
from the edge

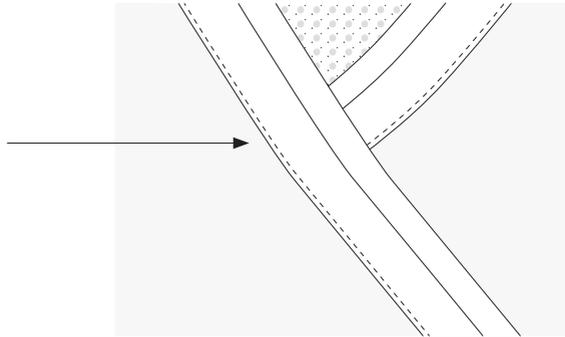

STEP 13

Sleeve: Lay and pin the sleeve sides together and stitch right sides together. Do the same with the facing N 13. Then lay and pin the **piece N 13 right side** with **wrong side sleeve** and match markings **AA** and **BB** on sleeve and facing and stitch.

