TOSCAminni
Schnittmanufaktur

Dress Samira

www.toscaminni.de
Designerin: Silvia Maria P. Vogt

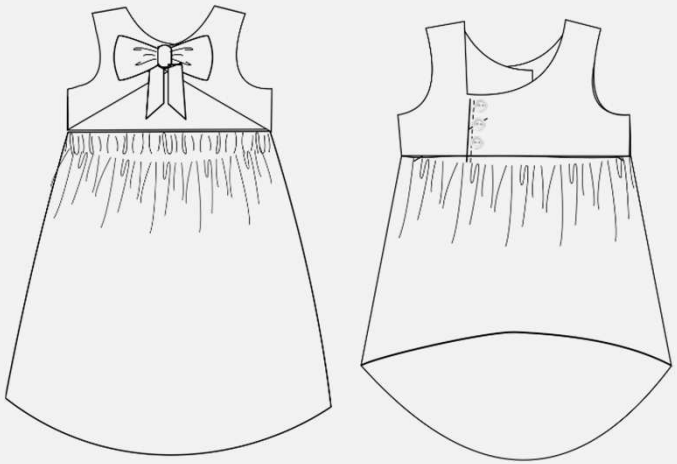

Art.-Nr: 2-K-8

Size: 80-140

Level of Difficulty:

TOSCAminni
Schnittmanufaktur

Sectional drawing

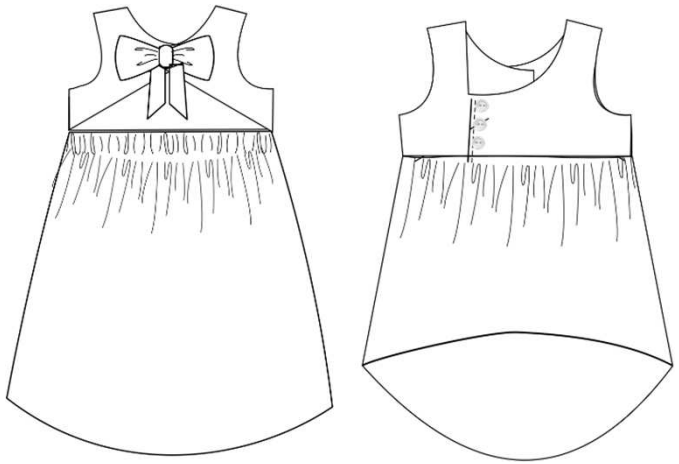

Shopping List Dress Samira

Material

- Woven fabrics: cotton, linen
- Lightweight interlining approx. 50 cm
- Rubber approx. 3 cm wide (approx. 5 cm less
- than half the bust size)
- alternatively -
- Smoke rubber 3 mm
- Embellishments
- lace as desired
- button or press stud

Fabric consumption - fabric width 1.40m

Size: 80/86	0,80 m
Size : 92/98	0,90 m
Size : 104/110	1,00 m
Size : 116/122	1,20 m
Size : 128/140	1,40 m

www.toscaminni.de
Designerin: Silvia Maria P. Vogt

TOSCAminni

Schnittmanufaktur

www.toscaminni.de

Designerin: Silvia Maria P. Vogt

Measurement table babies and girls

Size	68	74	80	86	92	98	104	110	116	122	128	134	140	146	152	158	164	170
1 Bust size	48	50	50,5	54	55	56	57	58	60	62	64	66	69	72	75	78	82	86
2 Waist size	47	48	51	50	51	52	53	54	55	56	57	58	60	62	64	65,5	67	73
3 Hip size	48	50	56	53	55	57	59	61	63	66	69	72	75	78,5	82	85,5	89	92,5
4 Back length	18,1	19,4	20,7	22	23,2	24,4	25,6	26,8	28	29,2	30,4	31,6	32,8	34,5	36,2	37,9	39,6	41,3
5 Arm length	21	23,5	26	28,3	30,6	32,9	35,2	37,5	39,8	42,3	44,8	47,3	49,8	52	54,2	56,4	58,6	60,8
6 Side trouser length	35	39	43	48,6	53	57,4	61,8	66,2	70,6	75,3	80	84,7	89,4	93,2	97	100,8	104,6	108,4
7 Shoulder width	6,2	6,6	7	7,1	7,4	7,7	8	8,3	8,6	8,9	9,2	9,5	9,8	10,2	10,6	11	11,4	11,8

This is how the length is measured:

Determine the size of the child or the height of the body:
Place your child slightly leaning against a wall. Place a book on the head and mark the height on the wall.
You can use the mark to measure and you will know how tall your child is.

Bust size:
Put a tape measure around your child's chest, it goes over the chest and shoulder blade.

Waist measurement:
Put a tape measure around the waist

Hip size:
Place the tape measure around the widest part of the hips.

Side trouser length:
Measure the length from the waist to the bottom of the foot

Shoulder width:
You measure from the base of the neck to the shoulder point

Sleeve length:
You measure with slightly angled arm from the shoulder point with set-in sleeves height of the arm ball.
For raglan sleeves from the neck

Back length:
Measured from the first cervical vertebra to the waist.

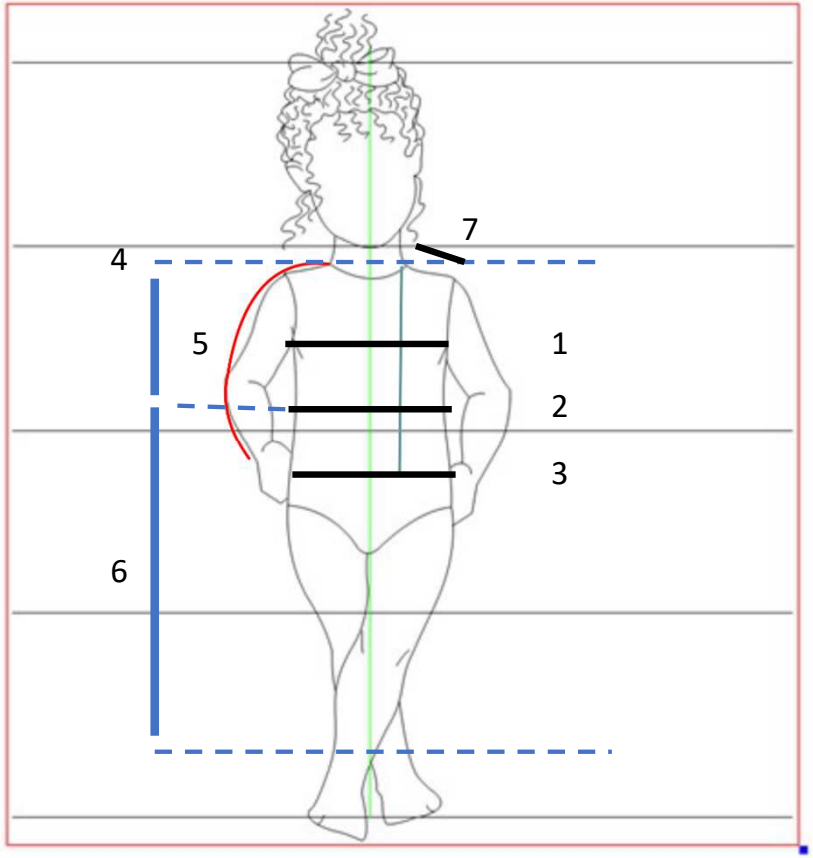

You have now taken your measurements, compared them to the pattern and realised that you need to adjust the pattern.

On the following pages you can see how you can change the length of your cut.

Here we go:

Cut out the paper pattern, place on fabric and cut to size. Then transfer the markings/register marks to the pattern pieces.

The black dots on the pattern are the marks that you should transfer to the fabric. Either mark the yoke points with chalk or cut small triangles in the hem allowance.

For fabrics that are the same on the left and right sides or are one colour, mark the left side with a chalk line. Overlock or zigzag all pieces unless the fabric does not fray, e.g. whale or jersey.

Cutting plan:

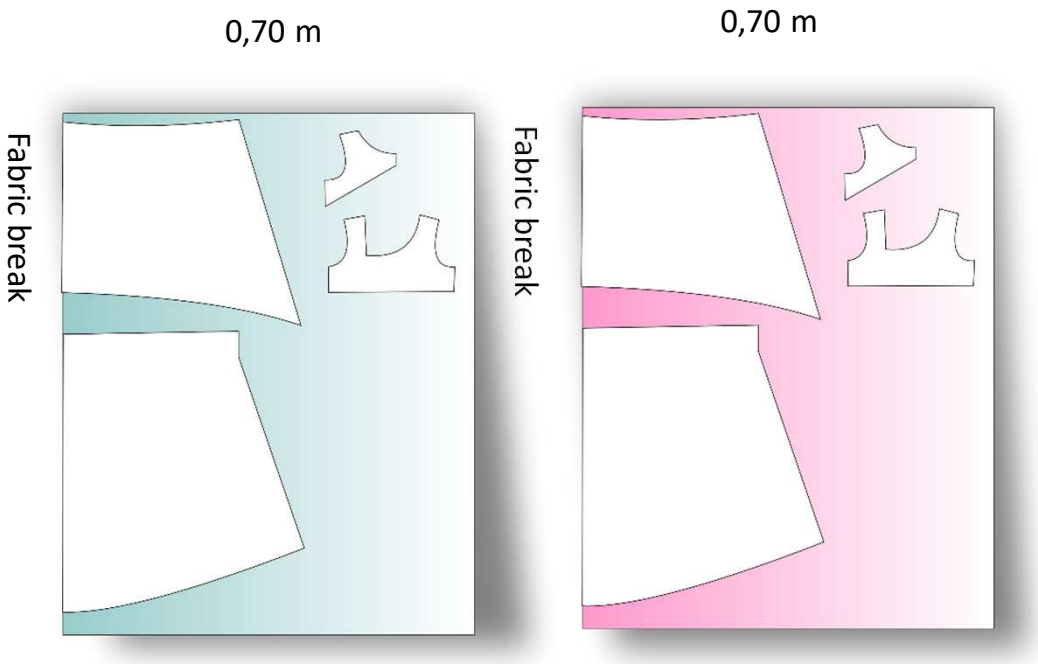

Cutted parts

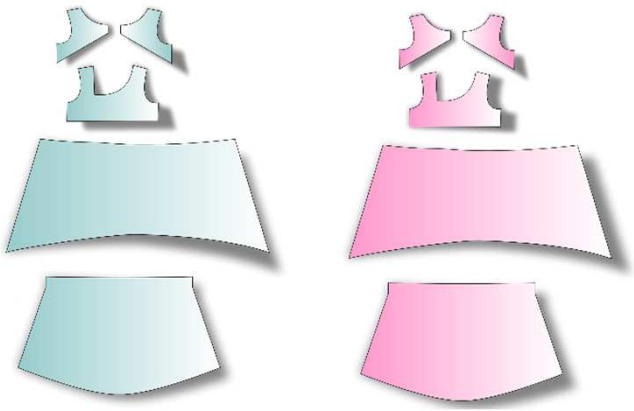

Technical drawing:

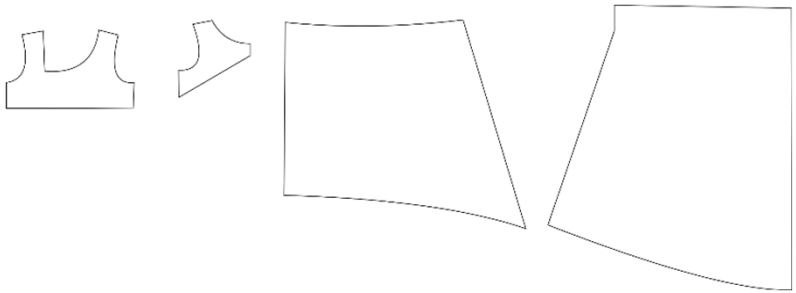

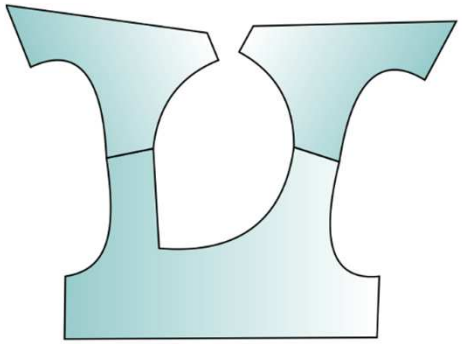

- Sew front and back pieces together at the shoulder

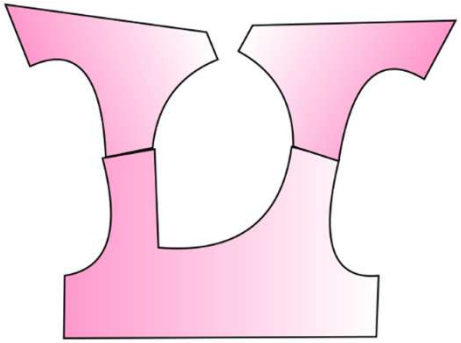

- Work on the chuck
- repeat

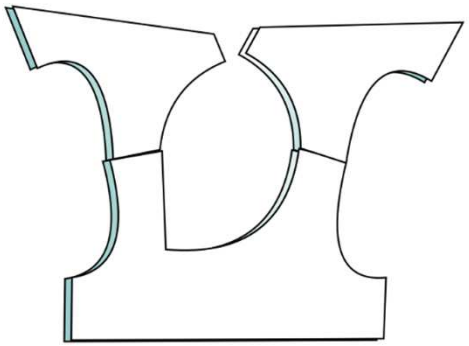

- Place lining and outer fabric
- Lay right sides together,

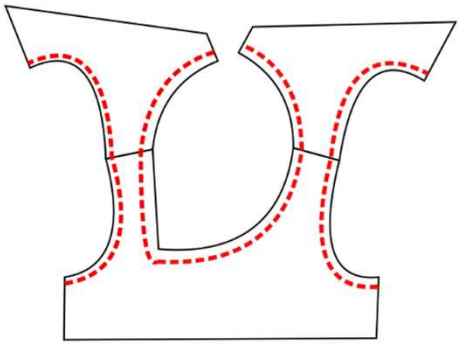

- Sew armholes and neckline
- From size 80-116, cut the seam allowance back to 0.5 cm, clip the curves and the corner at the neckline to just below the seam - from size 122 you can leave the seam allowance of 1 cm.



- Turn parts with a stick or other tool
- Iron

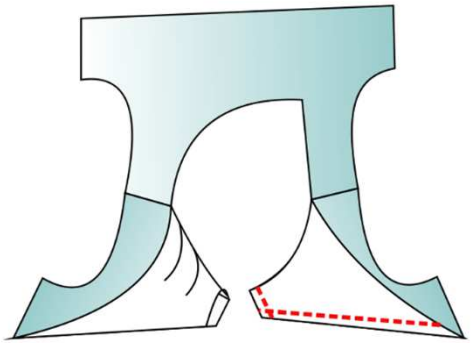

- Finally, close the back opening, placing the lining over the outer fabric.
- Now only the side seam is open.

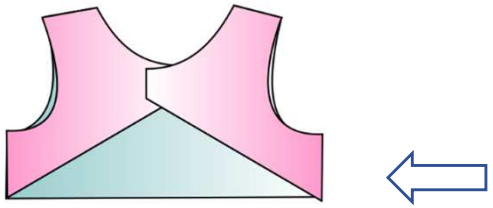

- Side seam is open

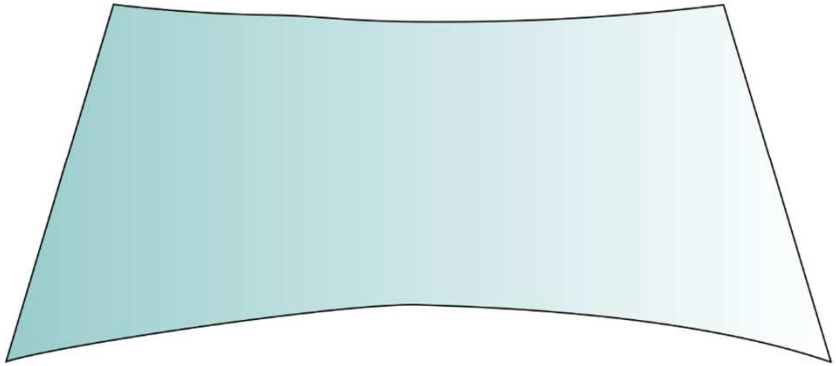

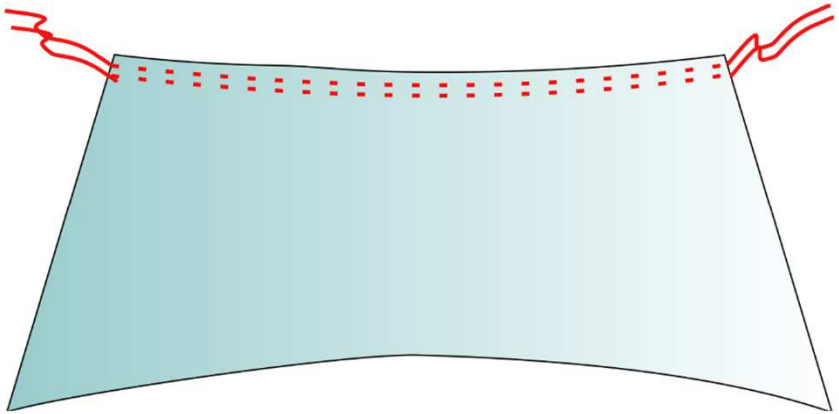

- Ruffle the front skirt (outer fabric and lining fabric).
- Set the stitch on your sewing machine to size 5.
- The first row is sewn 0.5 cm inwards - important front and end stitches are not locked.
- Leave approx. 8 cm long threads hanging
- Sew the second row about 0.5 cm from the first row.

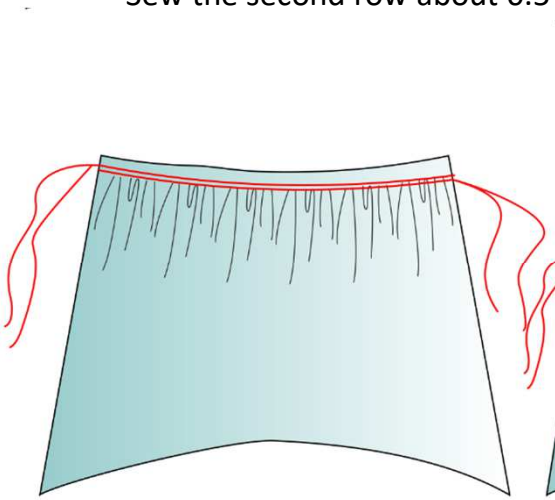

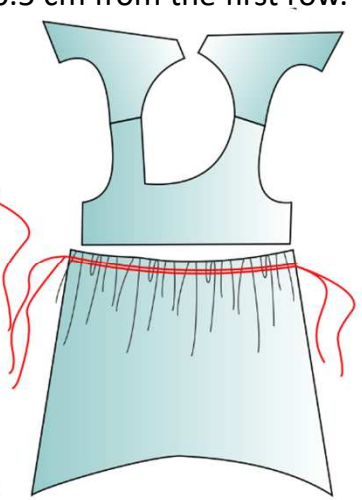

- Carefully tighten the lower threads
- Keep to top width

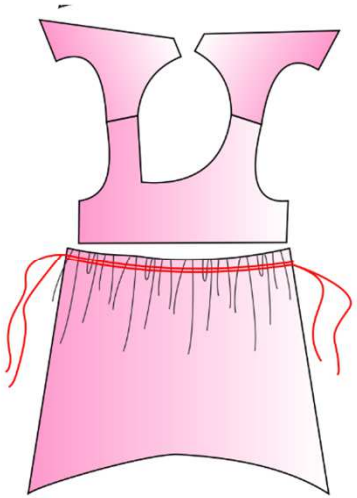

- Instead of crimping the lining, you can also fold it into large pleats.

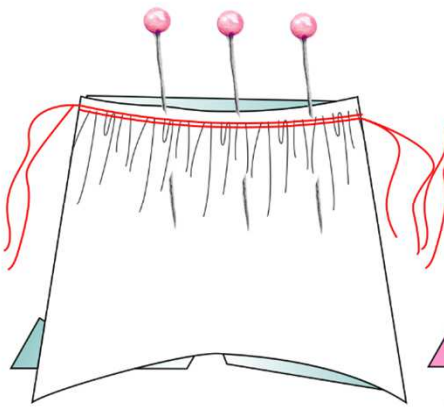

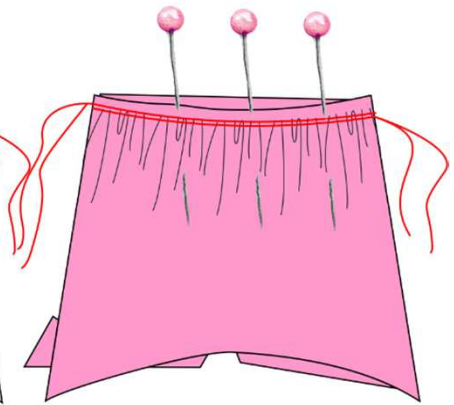

- Pin the skirt to the front
- The upper part and the lining upper part are worked separately.
- pin the skirt to each bodice separately

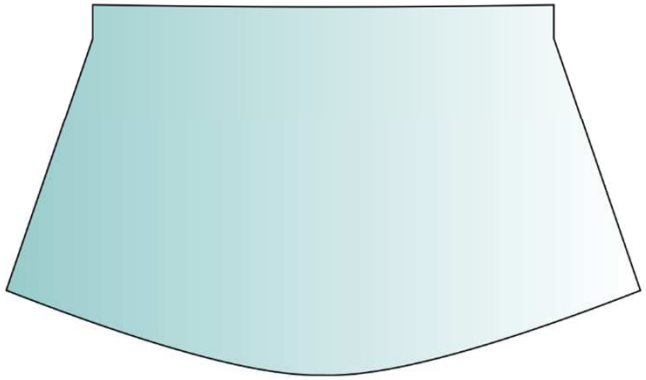

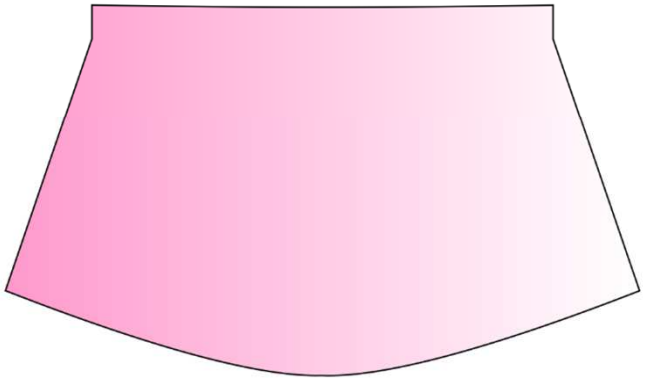

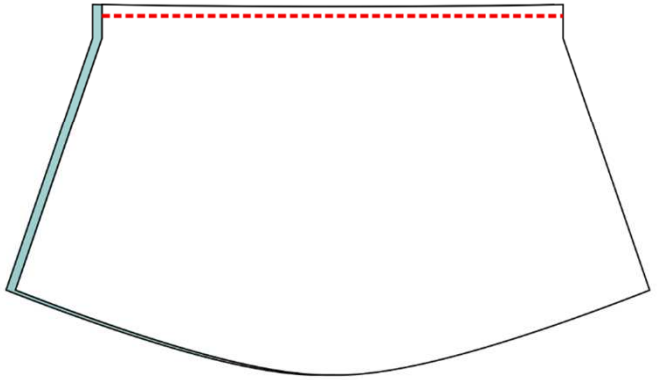

- Place the skirt back outer fabric and the corresponding lining piece right sides together.
- Sew together at the top

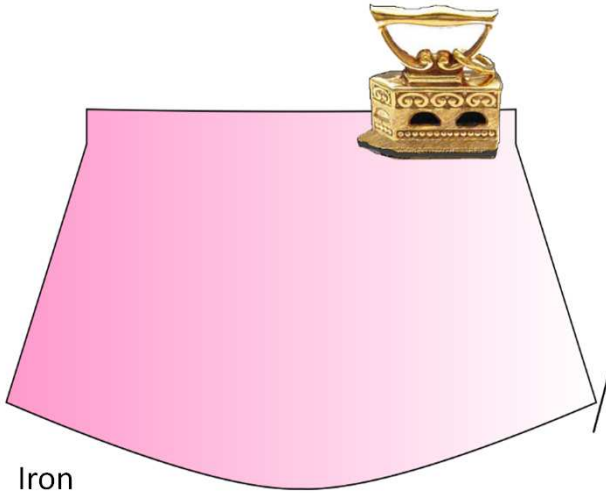

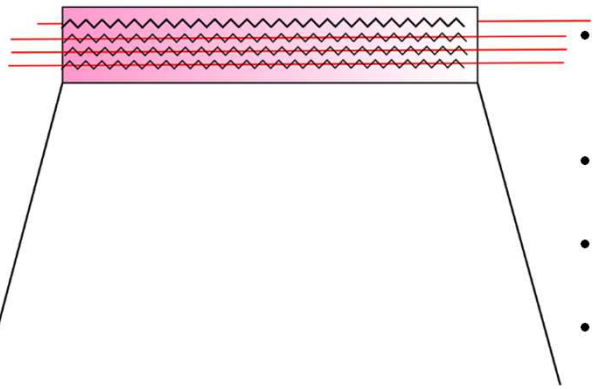

- Iron

- Smoking on top - 3 rows are enough
- You can buy 3 mm thick smocking rubber on Ebay, it is more resilient than the rubber that is wound onto the bottom spool.
- On the sewing machine, set zigzag stitch, maximum width and not too tight.
- On the lining side, sew over the elastic with a zigzag - watch out, the elastic must run through the zigzag stitch.
- Then use the elastic threads to keep the width. It should be 3-4 cm narrower than the front.
- Link the elastic threads together
- Cut off, leaving about 8 cm hanging to be safe.

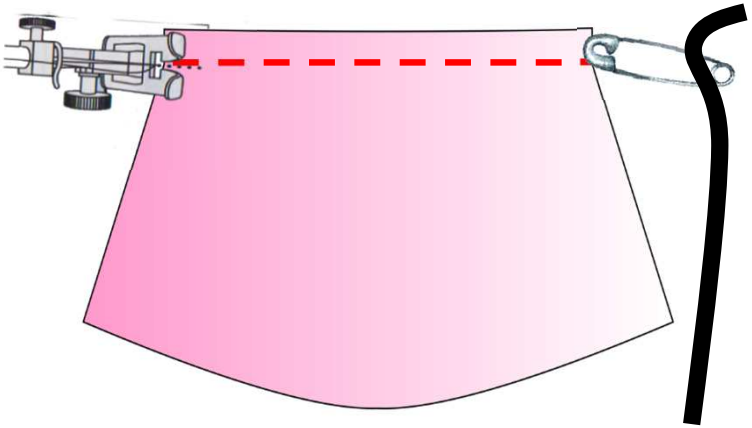

- The second possibility would be:
- After turning the skirt pieces, stitch another seam 3 cm from the edge. This depends on the width of the elastic.
- With the help of a safety pin, thread the elastic through the tunnel and again keep the width as described before.
- If you only have underwear elastic at home, you can of course sew 2 tunnels according to the width and insert 2 narrow elastics.

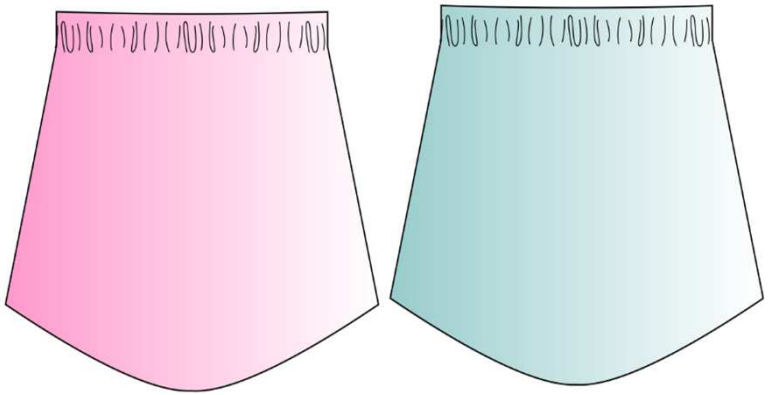

This is what the back skirt looks like from behind and from the front