

TOSCAminni

Schnittmanufaktur

Nähanleitung • Schnittmuster



Yaraa Trouser Skirt

Art.-Nr: 3-K-2

Size: 80-140


Level of Difficulty:



Nähanleitung • Schnittmuster



Schnittskizze

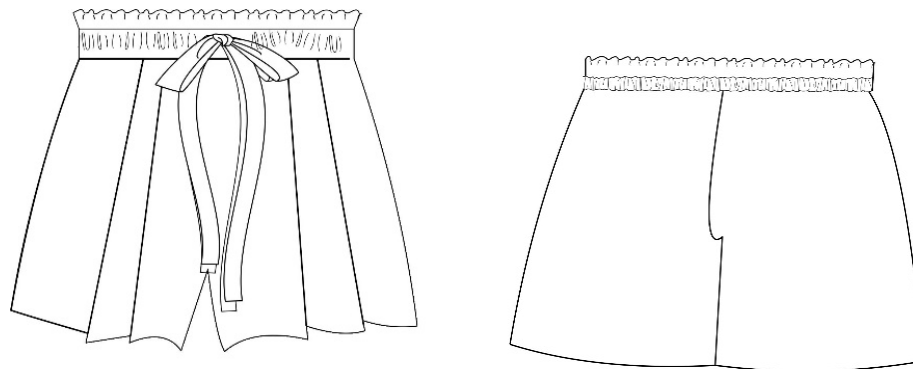

Yaraa Trouser Skirt

Material

- Woven fabrics
- Rubber approx. 1.5 cm wide
- 2 carabiner with counterpart

Fabric consumption - fabric width 1.40m

Size	80/86	92/98
Fabric	0,35m	0,40m
Rubber	0,28m	0,31m
Size	104/110	116/122
Fabric	0,45m	0,50m
Rubber	0,34 m	0,37m
Size	128/140	
Fabric	0,80m	
Rubber	0,40m	

Measurement table babies and girls



Size	68	74	80	86	92	98	104	110	116	122	128	134	140	146	152	158	164	170
1 Bust size	48	50	50,5	54	55	56	57	58	60	62	64	66	69	72	75	78	82	86
2 Waist size	47	48	51	50	51	52	53	54	55	56	57	58	60	62	64	65,5	67	73
3 Hip size	48	50	56	53	55	57	59	61	63	66	69	72	75	78,5	82	85,5	89	92,5
4 Back length	18,1	19,4	20,7	22	23,2	24,4	25,6	26,8	28	29,2	30,4	31,6	32,8	34,5	36,2	37,9	39,6	41,3
5 Arm length	21	23,5	26	28,3	30,6	32,9	35,2	37,5	39,8	42,3	44,8	47,3	49,8	52	54,2	56,4	58,6	60,8
6 Side trouser length	35	39	43	48,6	53	57,4	61,8	66,2	70,6	75,3	80	84,7	89,4	93,2	97	100,8	104,6	108,4
7 Shoulder width	6,2	6,6	7	7,1	7,4	7,7	8	8,3	8,6	8,9	9,2	9,5	9,8	10,2	10,6	11	11,4	11,8




Here we go:


Cut out the paper pattern, place on fabric and cut to size. Then transfer the markings to the pattern pieces.

The black dots on the pattern are the marks that you should transfer to the fabric. Either mark the fitting points with chalk or cut small triangles in the hem allowance.

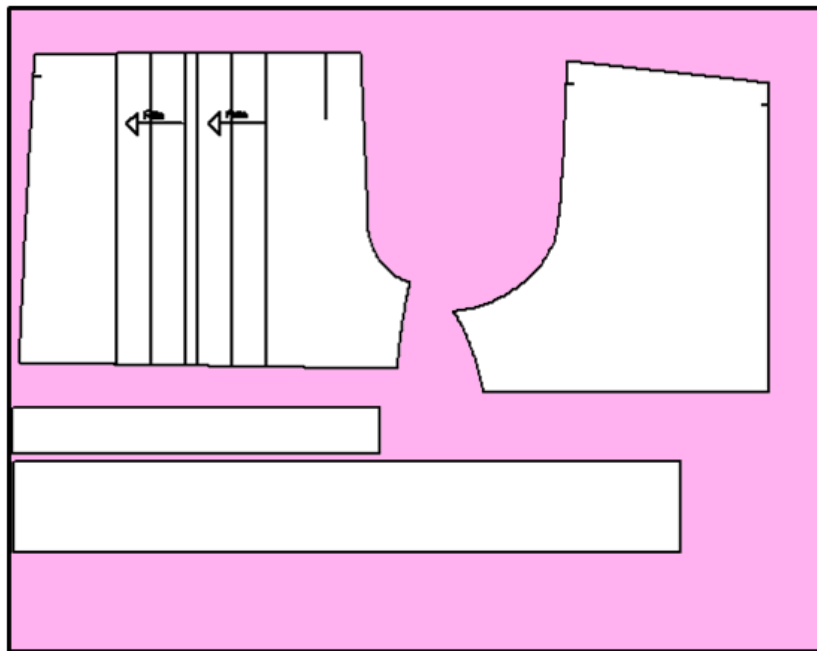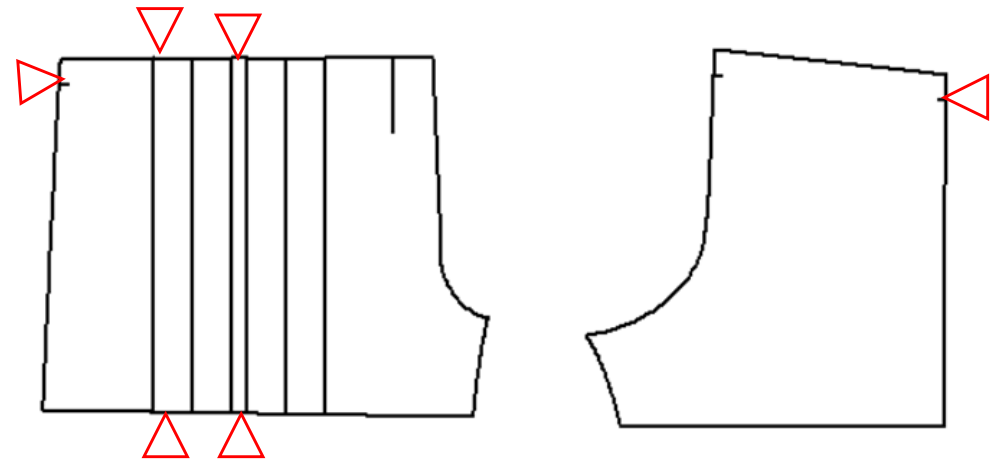


Cutted parts:

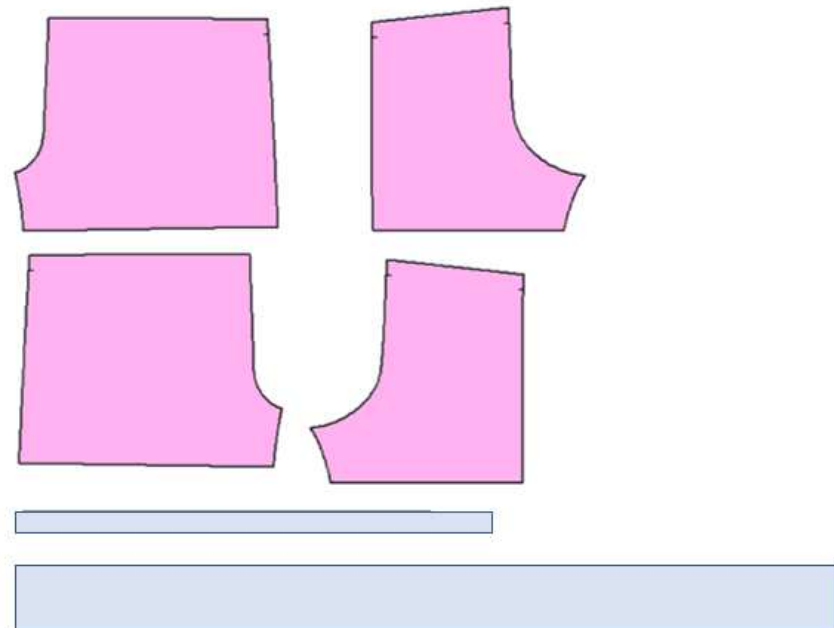

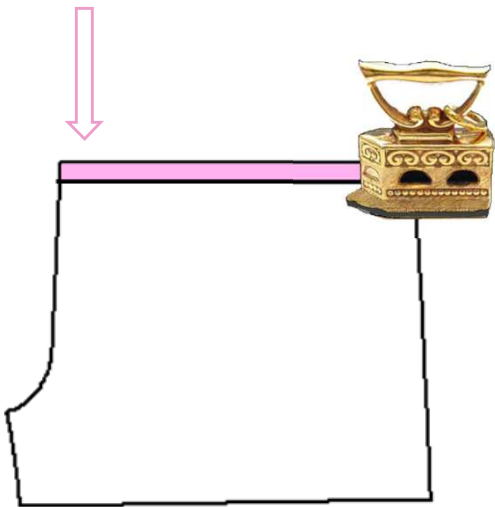

Front pieces

Press top seam allowance of 2.5 cm to the wrong side,
Sew

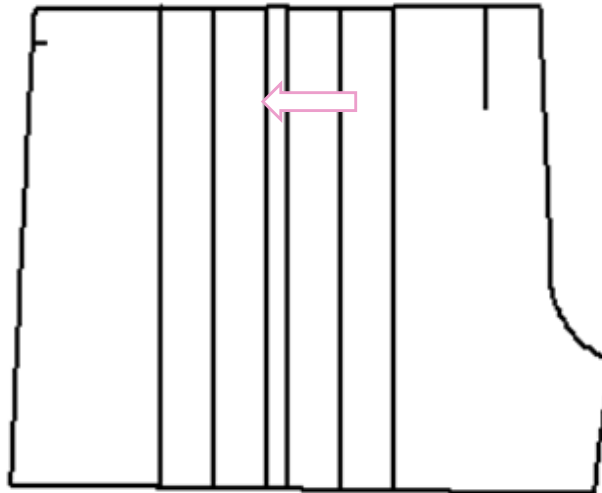


There are 2 pleats in the front, these must be made first,



The pleats are stitched from the top 6.00 cm.

Stitch from below approx. 10 cm



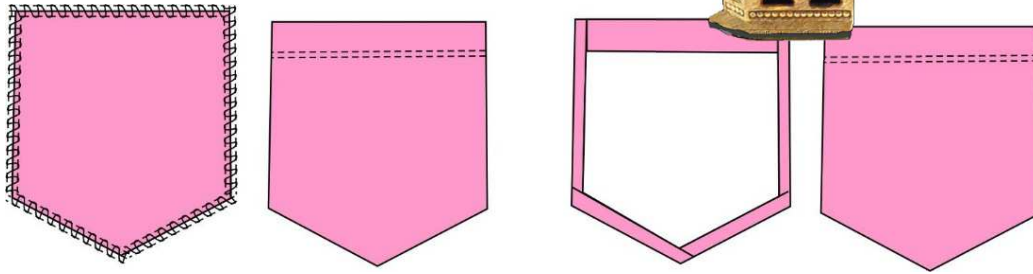

- Neaten pocket
- Press seam allowance to the left, sew
- Then press the seam allowance of 1 cm all around to the wrong side.
- Pin to back
- Sew on pocket

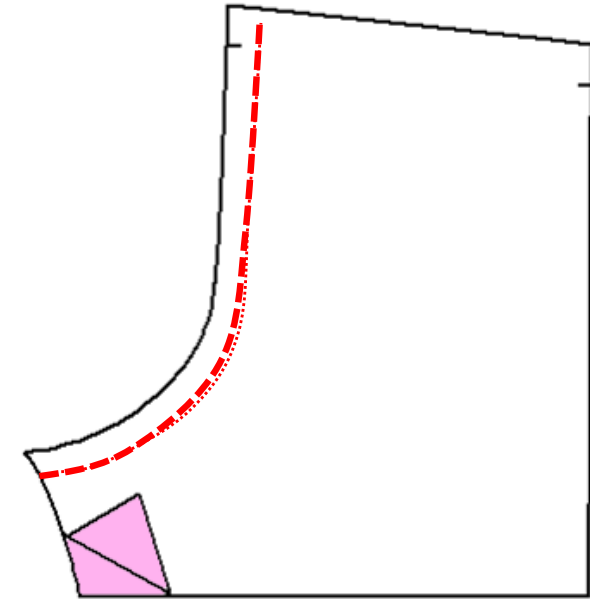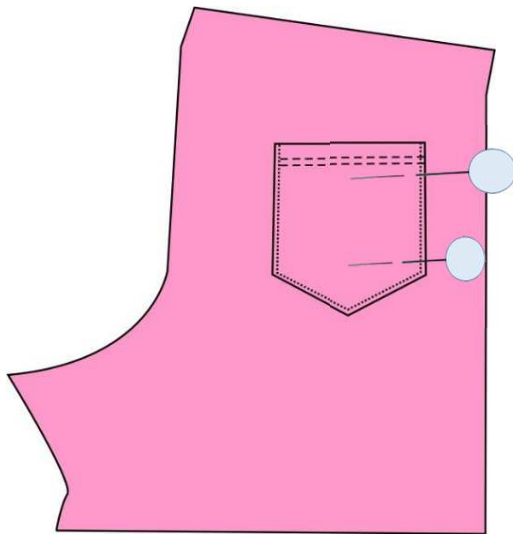


Sew the centre back seam.

First I sew both pieces with the overlock, then I stitch the two pieces together, taking into account the seam allowance of 1.00 cm.


The pieces are placed right sides together



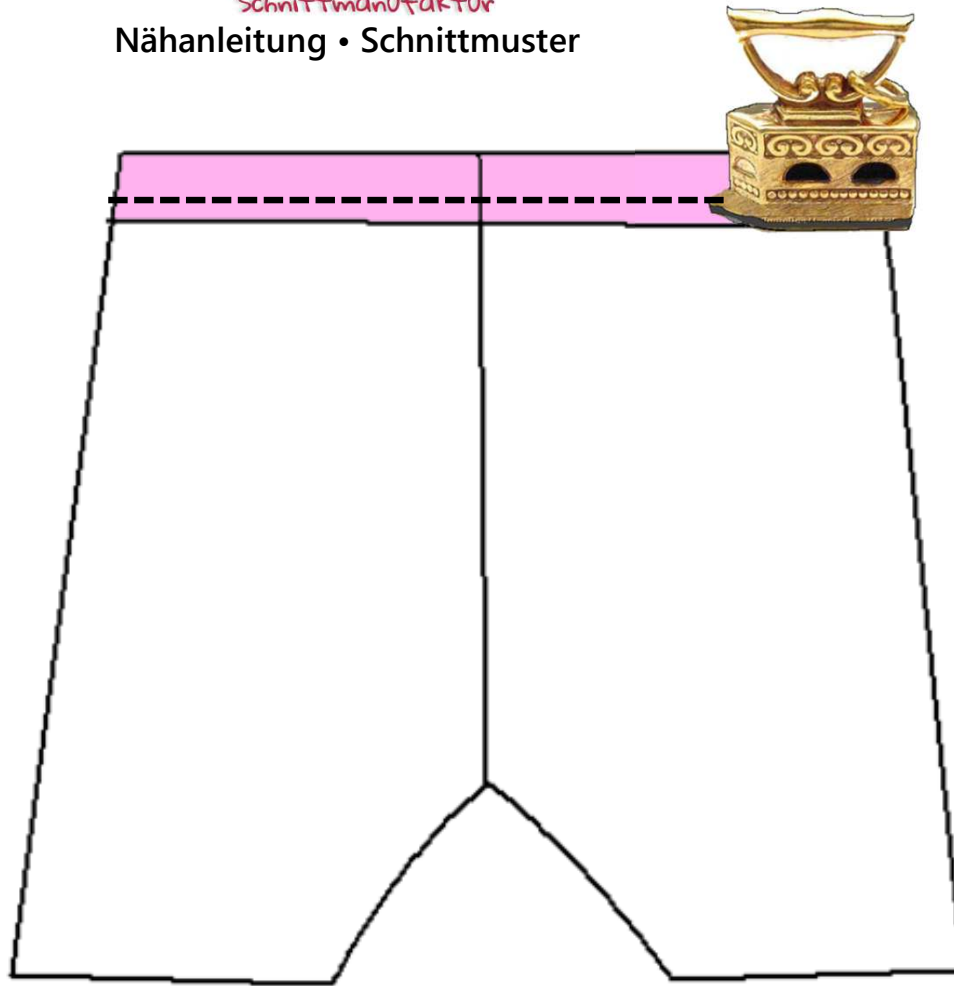

Press the seam allowance at the top of
the back piece to the wrong side,
Topstitching



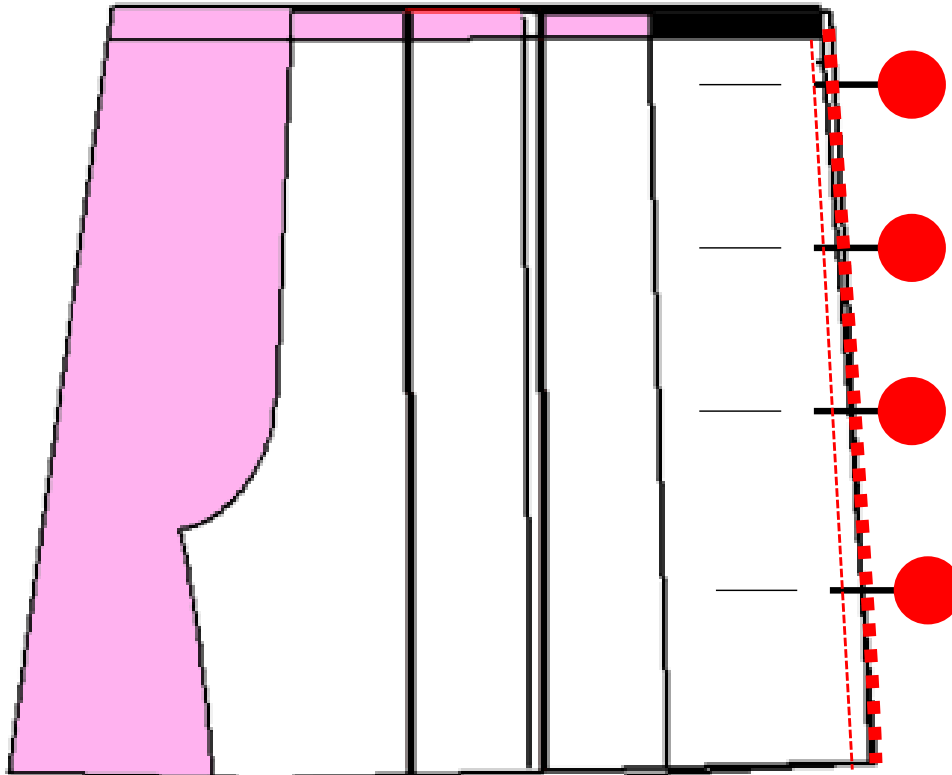

Sew the front pieces to the side pieces.

Again, first overlock both pieces together, but a narrow zigzag stitch with the sewing machine will also work.

Then sew both pieces with the backstitch.

Press the seams towards the centre back.


Now you can unpick the auxiliary seam for the pleats at the bottom and sew the hem of 2 cm. Iron the pleats back into shape



Front part

Back part

Front part

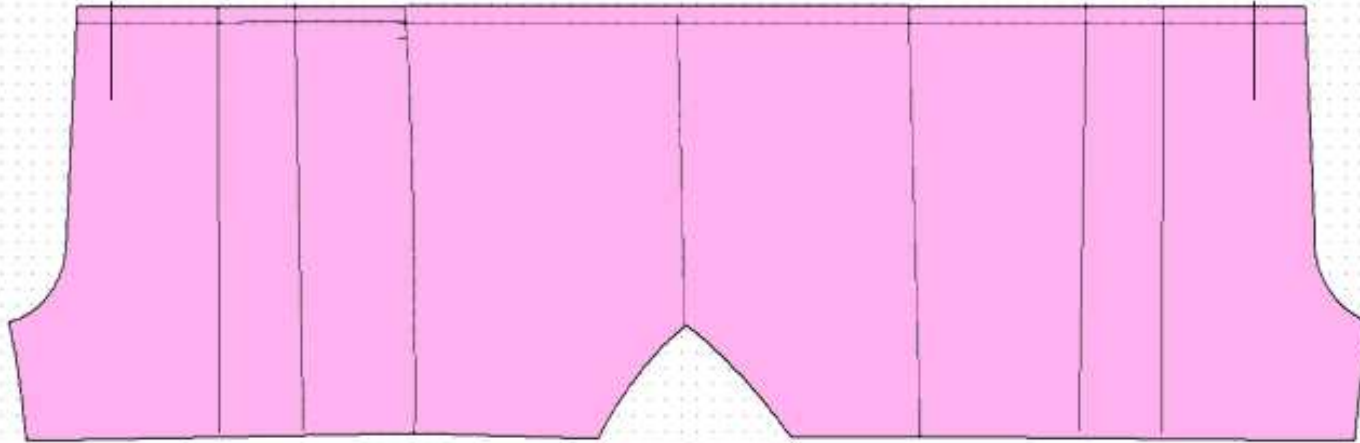

Sew on the tunnel for the belt

It is advisable to cut the belt a few cm longer so that there is some slack when the fabric stretches during sewing



Iron the seam allowances of the tunnel band of 1.00 cm to the left

