



## Pantie/Thong Havana



Level:  
Advanced

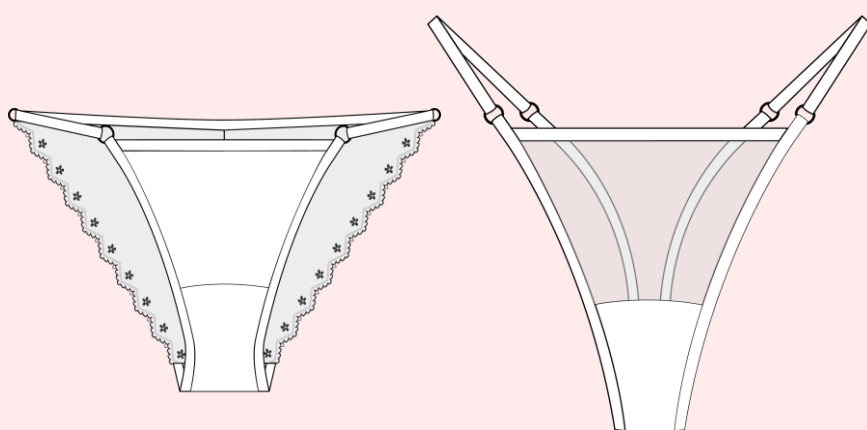


## Thong Havanna

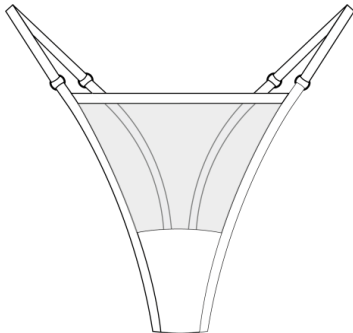

The pattern includes two styles: A panty and a thong. Both models have a slightly lower waistband, so that they sit below the hip bone. The thong is cut narrower in the crotch than the panty, so that there is not too much fabric gathering between the legs. You have the option to sew the front part from transparent mesh, or you choose the style with lace insert.

## Pantie Havanna

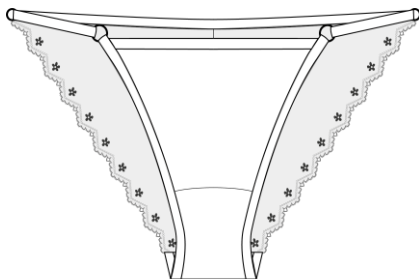

The basic cut of the panty is similar to the cut of the thong. The wide lace insert covers large parts of the butt. However, the panty does not cover the butt completely, but is cut somewhat cheeky. With the panty you can equally choose whether you want to sew the front part of lace or transparent mesh fabric.


## Measurement table

EU/US	32/1	34/2	36/4	38/6	40/8	42/10	44/12	46/14
Bust measurement	82 cm	86 cm	90 cm	94 cm	98 cm	102 cm	106 cm	110 cm
Waist	66 cm	70 cm	74 cm	78 cm	82 cm	86 cm	90 cm	94 cm
Hip measurement	92 cm	95 cm	98 cm	101 cm	104 cm	109 cm	114 cm	119 cm
The Pantie/Thong Havanna is selected according to the hip circumference.								



Havana panty/thong is designed on mesh fabric and elastic lace. Mesh fabrics are bi-elastic sheer fabrics which are also called elastic tulle. When buying, make sure that the fabric contains at least 5% spandex! For the gusset, I recommend you use an organic cotton jersey for hygiene reasons. If you want it extra fine, use a bamboo jersey for the gusset.

- ✓ Elastic mesh/tulle (minimum 5% spandex!)
- ✓ Elastic lace
- ✓ A piece of cotton or bamboo jersey approx. 15 cm x 20 cm

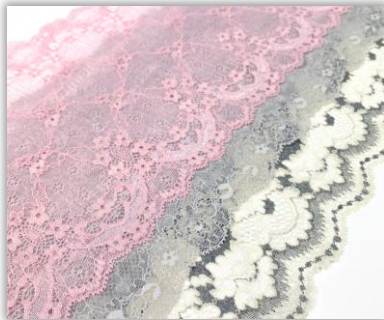

You will also need the following:

- ✓ Stretch needle
- ✓ 20 cm Framilastic 6mm wide (only for the lace front)
- ✓ Approx. 2 m fold over elastic
- ✓ Straps (A table with the required length for the side straps can be found on the next page)
- ✓ 4 rings in the same width as the fold over elastic and strap elastic

All seam allowances are included in the pattern (1cm).



Fabric requirements								
	32/1	34/2	36/4	38/6	40/8	42/10	44/12	46/14
The consumption for Pantie and Thong is identical								
Mesh	30 cm	30 cm	30 cm	30 cm	30 cm	30 cm	30 cm	30 cm
Lace	1 m	1 m	1,10 m	1,10 m	1,10 m	1,20 m	1,20 m	1,20 m

Minimum width of lace								
	32/1	34/2	36/4	38/6	40/8	42/10	44/12	46/14
Width lace	16 cm	17 cm	17 cm	18 cm	18 cm	19 cm	19 cm	20 cm

## Pantie



Make sure you have cut out all the pattern pieces correctly for the panty. The instructions for the thong start on page 12. First, take the front piece and sew a piece of clear elastic (Framilastic) just below the lace edge with a zig zag stitch. If you have chosen a mesh front, skip this step.

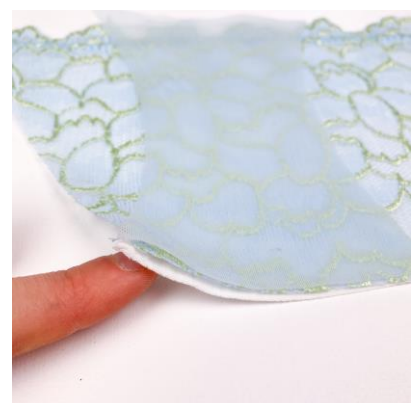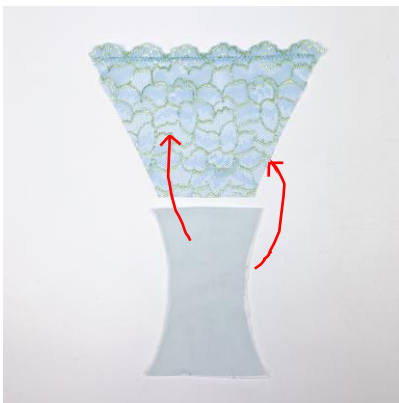

Now lay the front piece with the right side up in front of you. Also place the two gusset pieces in front of you. The gusset of main fabric is on top, the gusset of lining fabric is underneath. Now fold the gusset of main fabric up onto the front piece and fold the gusset of lining fabric underneath. The front piece should now be enclosed by the two gussets.



When laid on top of each other, the corners stick out a little. Don't worry about it. This is intended. Pin the pieces to each other and then sew it in place with a straight stitch at 1 cm from the edge. Then trim back the seam allowance slightly. Make sure to cut straight because you will see the edge later!